




DJM011

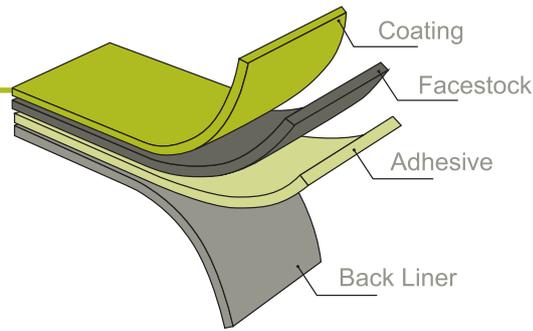

Facestock/Coating

A matt white, coated paper with a highly absorbent surface structure specifically designed for waterbased inkjet printing. The facestock is made from FSC® certified paper.

Basis Weight	92 g/m ²	ISO 536
Caliper	110 µm	ISO 534

Adhesive

A general purpose removable, acrylic based adhesive.

Liner

A supercalendered paper. The liner is made from FSC® certified paper.

Basis Weight	59 g/m ²	ISO 536
Caliper	53 µm	ISO 534

Laminate

Total Caliper	177 µm +/-10%	ISO 534
---------------	---------------	---------

Performance Data

Initial Tack	4 N/25mm	FTM 9 Glass
Peel Adhesion 90°	2 N/25mm	FTM 2 St.St
Min. Application Temp.	-15 °C	
Service temperature	-30°C to 80°C	

Adhesive Performance

The adhesive features good tack and adhesion in combination with superior and clean removability from most substrates. Good UV resistance and long term removability. The adhesive allows label application at a wide temperature range and it retains its removable properties even at very low temperatures.

Application and Use

The product is used in a variety of labelling applications, when the advantages of digital printing: short runs, last minute changes, personalised layouts and fast turn-round full colour printing are required. The product is a result of the emerging demand for short run 'quality' colour print, both in business and at home. The face material is designed to give excellent density, print definition and vivid colours with photo ink. Quick drying and enhanced moisture resistance offer good handleability after printing.

R500N removes clean from many substrates from polymeric (e.g. PET, PP, ABS), card and fibre board, aluminium, stainless steel or glass (not suitable for window labelling). The use of R500N adhesive on certain types of cardboards, or recycled fibres can be critical and it is strongly recommended to proceed to application testing before use.

Conversion and Printing

In addition to InkJet the material can be printed by Thermal Transfer and conventional technologies; we recommend flexo for best results using low viscosity inks, the ink absorbent consumption may be high due to the nature of the facestock.

Tasco Gent

Industrial Park Asper - Legen Heirweg 59
9890 Gavere BE
Tel. +32 9 281 08 50
Fax +32 9 281 08 70
E-mail info@tasco.be

Tasco Lille

130, Boulevard de la Liberté
F-59000 LILLE
Tel. +33 3 62 26 00 22
E-mail info@tascofrance.fr

RCS LILLE METROPOLE B 793 237 843 - Capital : 25.000 €
Site www.tasco.be - www.tascofrance.fr


Tasco Paris

13, Rue Marie Poussepain - Z.A. Lavoisier
F-91410 DOURDAN
Tel. +33 3 62 26 00 20
Fax +33 3 62 26 00 23





DJM011

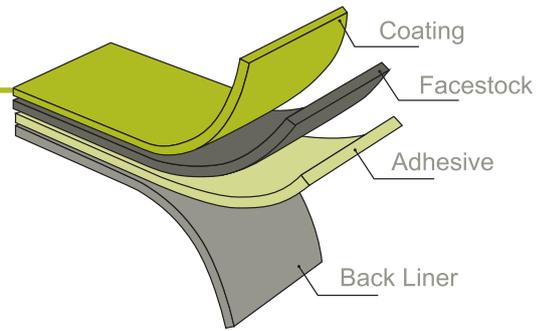

Compliance and Approvals

R500N complies with European food regulation 1935/2004/EC, with the German Recommendation (BfR) XIV and with FDA 175.105. It also meets the demands of the limit values laid down in 10/2011/EU. In accordance with the requirements of relevant EU food regulations, the adhesive R500N may safely stand in direct contact with dry, moist and fatty foodstuffs which have a reduction factor of at least 2 according to the Commission Regulation (EU) No 10/2011, with vegetable oil as fatty food simulant used for migration testing.

The laminate is made with FSC® certified paper.

Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

Warranty

The above technical information, statements and recommendations are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All Tasco products are warranted to be free of defects in material or workmanship for a period of one year from date of shipment. In no way will Tasco be responsible for claims beyond the replacement value of the defective product or in any way liable or responsible for consequential or incidental damage.

No express warranties and no implied warranties, whether of merchantability or fitness for any particular use, or otherwise, except as set forth above (which is made expressly in lieu of all other warranties) shall apply to products sold by Tasco. Tasco specifically disclaims and excludes all other such warranties. No waiver, alteration, addition or modification of the foregoing conditions shall be valid unless made in writing and signed by a director of Tasco.

Tasco Gent

Industrial Park Asper - Legen Heirweg 59
9890 Gavere BE
Tel. +32 9 281 08 50
Fax +32 9 281 08 70
E-mail info@tasco.be

Tasco Lille

130, Boulevard de la Liberté
F-59000 LILLE
Tel. +33 3 62 26 00 22
E-mail info@tascofrance.fr
RCS LILLE METROPOLE B 793 237 843 - Capital : 25.000 €
Site www.tasco.be - www.tascofrance.fr

Tasco Paris

13, Rue Marie Poussepin - Z.A. Lavoisier
F-91410 DOURDAN
Tel. +33 3 62 26 00 20
Fax +33 3 62 26 00 23

