




# LIM012

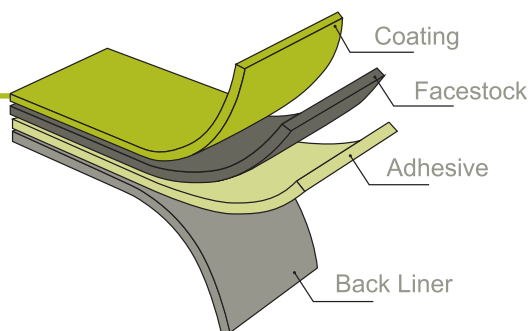

## Facestock/Coating

A matt, white woodfree machine finished paper with good opacity, excellent absorption and superior toner bonding characteristics.

The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451)

Basis Weight	64 g/m <sup>2</sup>	ISO 536
Caliper	75 µm	ISO 534

## Adhesive

A special purpose removable, acrylic based adhesive.

## Liner

Hygroflat 55, a one side coated, bleached kraft paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	55 g/m <sup>2</sup>	ISO 536
Caliper	58 µm	ISO 534

## Laminate

Total Caliper	145 µm±10%	ISO 534
---------------	------------	---------

## Performance data

Initial Tack	4.5 N/25mm	FTM 9 Glass
Peel Adhesion 90°	2.5 N/25mm	FTM 2 St.St
Min. Application Temp.	-15 °C	
Service temperature	-30°C to 80°C	

## Adhesive performance

The specially formulated removable adhesive features good tack and adhesion performance in combination with superior and clean removability. The adhesive has good UV resistance and relatively long term removability, it allows application at a wide temperature range and retains its removability properties at fairly low temperatures. The adhesive is specially designed for VIP products, e.g. for laserprinters and copiers.

## Application and use

The face material is designed for the manufacture of A4 sheets for use in laserprinters, copiers, monochrome and colour inkjet printers. The surface structure provides excellent toner bonding and print resolution. This makes it ideal for label applications using variable information such as address, instruction and inventory labels, labels for office use and many other applications.

The hygroflat backing paper is specially suited to the more critical refolding demands of high-speed computer printers, providing optimum layflatness and excellent interfolding characteristics.

## Conversion and Printing

Facestock is suitable for simple line or process printing by flexo and offset. The material can be converted by the conventional roll-to-sheet conversion technologies.

The Backing paper can be printed with conventional printing methods.

## Warranty

The above technical information, statements and recommendations are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All Tasco products are warranted to be free of defects in material or workmanship for a period of one year from date of shipment. In no way will Tasco be responsible for claims beyond the replacement value of the defective product or in any way liable or responsible for consequential or incidental damage.

No express warranties and no implied warranties, whether of merchantability or fitness for any particular use, or otherwise, except as set forth above (which is made expressly in lieu of all other warranties) shall apply to products sold by Tasco. Tasco specifically disclaims and excludes all other such warranties. No waiver, alteration, addition or modification of the foregoing conditions shall be valid unless made in writing and signed by a director of Tasco.

### Tasco Gent

Industrial Park Asper - Legen Heirweg 59  
9890 Gavere BE  
Tel. +32 9 281 08 50  
Fax +32 9 281 08 70  
E-mail info@tasco.be

### Tasco Lille

130, Boulevard de la Liberté  
F-59000 LILLE  
Tel. +33 3 62 26 00 22  
E-mail info@tascofrance.fr  
RCS LILLE METROPOLE B 793 237 843 - Capital : 25.000 €  
Site www.tascoshop.eu

### Tasco Paris

13, Rue Marie Poussepin - Z.A. Lavoisier  
F-91410 DOURDAN  
Tel. +33 3 62 26 00 20  
Fax +33 3 62 26 00 23

