




DJP027

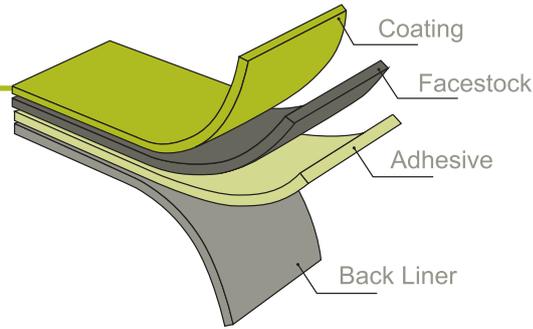

Facestock/Coating

A matt white polypropelene with highly absorbent surface structure specifically designed for water-based inkjet printing of BS 5609-certified labels.

Basis Weight	57 g/m ²	ISO 436
Caliper	87 μm	ISO 534

Adhesive

This is the new generation clear transparent emulsion adhesive for oil can applications. It's a clear permanent adhesive featuring excellent initial tack, adhesion, "wet-out" performance even on apolar surfaces such as HDPE. Improved temperature water, solvent and chemical resistance.

Liner

BG40 white, a supercalendered glassine paper.

Basis Weight	61 g/m ²	ISO 536
Caliper	54 μm	ISO 534

Laminate

Total Caliper	163 μm±10%	ISO 534
---------------	------------	---------

Performance data

Initial Tack	16 N/25mm	FTM 9 Glass
Peel Adhesion 90°	10 N/25mm	FTM 2 St.St
Min. Application Temp.	0 °C	
Service temperature	-20°C to 80°C	

Application and use

Applications where the label has to survive harsh environments, e.g. drum labelling. The product can also be used in a variety of labelling applications which need water resistance and can benefit from advantages of digital inkjet printing: short runs, last minute changes, personalised layouts and fast turn-round full colour printing.

Adhesive has been developed for in-house oil can labelling. For external oil can labelling testing is strongly recommended.

Conversion and Printing

The facestock is designed for water-based inkjet printing in compliance with GHS standards. It exhibits good light and water fastness with both pigment and dye-based inks. Printed with pigment inks can be BS 5609 certified.

Special Approvals

The product has received BS 5609 Section 2 compliancy. The face material is compliant with BS 5609 section 3 when printed with the following printing machines:

- Primera LX pigment printers
- Swiftcolor 4000 and 8000P
- Epson C-3500
- Kiaro!D
- NeuraLabel 300x (* in request)

Warranty

The above technical information, statements and recommendations are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All Tasco products are warranted to be free of defects in material or workmanship for a period of one year from date of shipment. In no way will Tasco be responsible for claims beyond the replacement value of the defective product or in any way liable or responsible for consequential or incidental damage.

No express warranties and no implied warranties, whether of merchantability or fitness for any particular use, or otherwise, except as set forth above (which is made expressly in lieu of all other warranties) shall apply to products sold by Tasco. Tasco specifically disclaims and excludes all other such warranties. No waiver, alteration, addition or modification of the foregoing conditions shall be valid unless made in writing and signed by a director of Tasco.

Tasco Gent

Industrial Park Asper - Legen Heirweg 59
 9890 Gavere BE
 Tel. +32 9 281 08 50
 Fax +32 9 281 08 70
 E-mail info@tasco.be

Tasco Lille

130, Boulevard de la Liberté
 F-59000 LILLE
 Tel. +33 3 62 26 00 22
 E-mail info@tascofrance.fr

Tasco Paris

13, Rue Marie Poussepin - Z.A. Lavoisier
 F-91410 DOURDAN
 Tel. +33 3 62 26 00 20
 Fax +33 3 62 26 00 23

RCS LILLE METROPOLE B 793 237 843 - Capital : 25.000 €

Site www.tasco.be - www.tascofrance.fr

